


Výstupné filtre

Materiál: Teleso: Hliník. Filter: Spekaný kov.
Prevádzkový tlak: max. 10 bar.

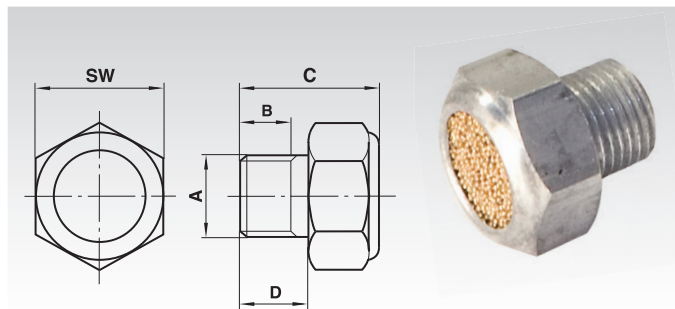


Informácie potrebné na objednanie napr.: Produkt č. 86531511, Výstupný filter,
Vonkajší závit Ø G¹/₈A

Produkt č.	A	B mm	C mm	D mm	SW mm	prietok pri 6 bar prevádzkovom tlaku	Hmot.
						m ³ /h	g
865 315 11	G ¹ / ₈ A	6	16	8	15	11,3	6
865 315 12	G ¹ / ₄ A	8	22	10	23	27,7	18
865 315 14	G ¹ / ₂ A	10,5	25	13	30	37,8	30
865 315 16	G ³ / ₄ A	14	31	16	42	98,3	50
865 315 18	G 1 A	15	35	19	47	138,6	91

Tlmiče

Materiál: Filter: Spekaný kov. Teleso: Mosadz.
Prevádzkový tlak: max. 10 bar.

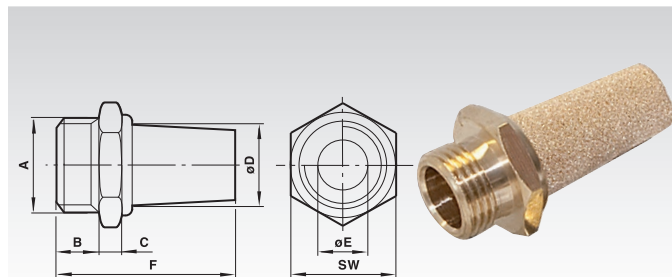

Informácie potrebné na objednanie napr.: Produkt č. 86600500, Tlmič, Závit M5

Produkt č.	A	B mm	C mm	Ø D mm	Ø E mm	F mm	SW mm	Hluk dB(A), vo vzdialenosti 1m		Hmot. g
								pri 0,7 bar	pri 6 bar	
866 005 00	M5	5	5	5	2,5	20	7	56	70	4
866 018 00	G 1/8 A	6	5	9,5	6	24	13	66	75	10
866 028 00	G 1/4 A	8	5	12	8,5	33	17	68	78	20
866 038 00	G 3/8 A	10	5	17	12	44	22	75	84	39
866 048 00	G 1/2 A	12	5,5	20	14,8	56	27	75	88	68
866 068 00	G 3/4 A	14	6	26	19	80	32	87	96	130
866 088 00	G 1 A	16	6	31	25	82	41	93	100	200