

Countersunk Washers


Materiál: oceľ, turned, black oxide finish.
Nerezová oceľ 1.4305 (AISI 303),
turned, matte shot-blasted.




Standard countersunk washers for axial securing. They are fastened to the end faces of shaft ends using countersunk screws DIN EN ISO 2009 (ex DIN 7991) or DIN EN ISO 10642 (ex DIN 963).

Informácie potrebné na objednanie: napr.: Produkt č. 65310012, countersunk washer for M3, diameter 12mm, steel, turned, black oxide finish

Produkt č. oceľ	Produkt č. nerezová oceľ	for Screws Size	d ₁ mm	d ₂ mm	d ₃ mm	s mm	Hmotnosť g
653 100 12	653 100 12A2	M3	3,2	12	6,5	2,3	1,5
653 100 16	653 100 16A2	M4	4,3	16	8,5	3	3,4
653 100 20	653 100 20A2	M4	4,3	20	8,5	3	5,7
653 100 22	653 100 22A2	M5	5,3	22	10,3	3,5	7,8
653 100 25	653 100 25A2	M5	5,3	25	10,3	3,5	10,4
653 100 28	653 100 28A2	M5	5,3	28	10,3	3,5	13,3
653 100 32	653 100 32A2	M6	6,4	32	12,3	4	19,7
653 100 36	653 100 36A2	M6	6,4	36	12,3	4	25,4
653 100 40	653 100 40A2	M6	6,4	40	12,3	5	39,8
653 100 45	653 100 45A2	M6	6,4	45	12,3	6	61,2
653 100 52	653 100 52A2	M6	6,4	52	12,3	6	82,6

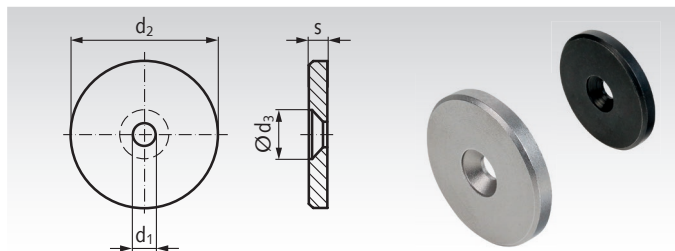

Příklad použití

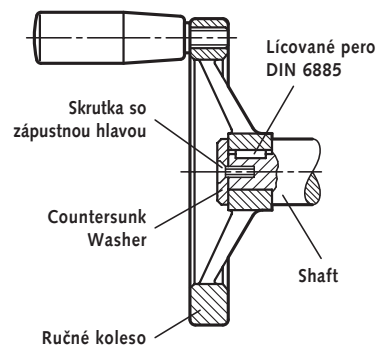

Loctite zaistovanie
závitov a spojovacie
produkty na str. 1034.



Kružky podložky
DIN 988
str. 496