


Vedenia DS 2330 DL, šírka 19.5 mm, to 15 kg, nerezová oceľ, úplný výsuv

Material: Nerezová oceľ 1.4301 (AISI 304).




Lightweight, compact high-temperature rail for refrigerators, ovens and industrial high-temperature applications.

- All materials are suitable for contact with food.
- Resistant to cleaning with water.
- Dry lubrication through integrated graphite elements.
- Ideal for very harsh environments where structural steel could corrode and classic grease lubrication is not possible.
- When mounted horizontally, the load value is reduced by 75%.
- Životnosť 10,000 cyklov.
- Teplotná škála: -80°C to +500°C.

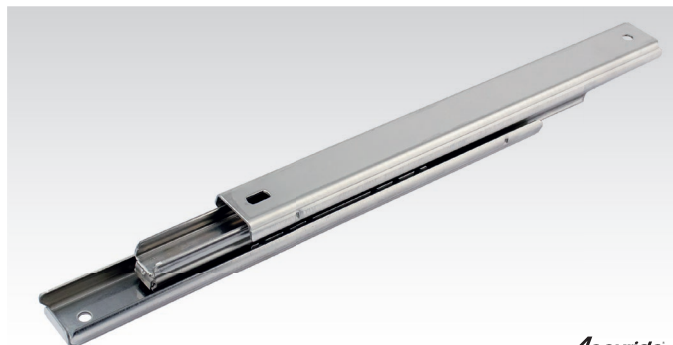

Accuride

Informácie potrebné na objednanie: napr.: Produkt č. 64906615, Vedenia DS 2330 DL

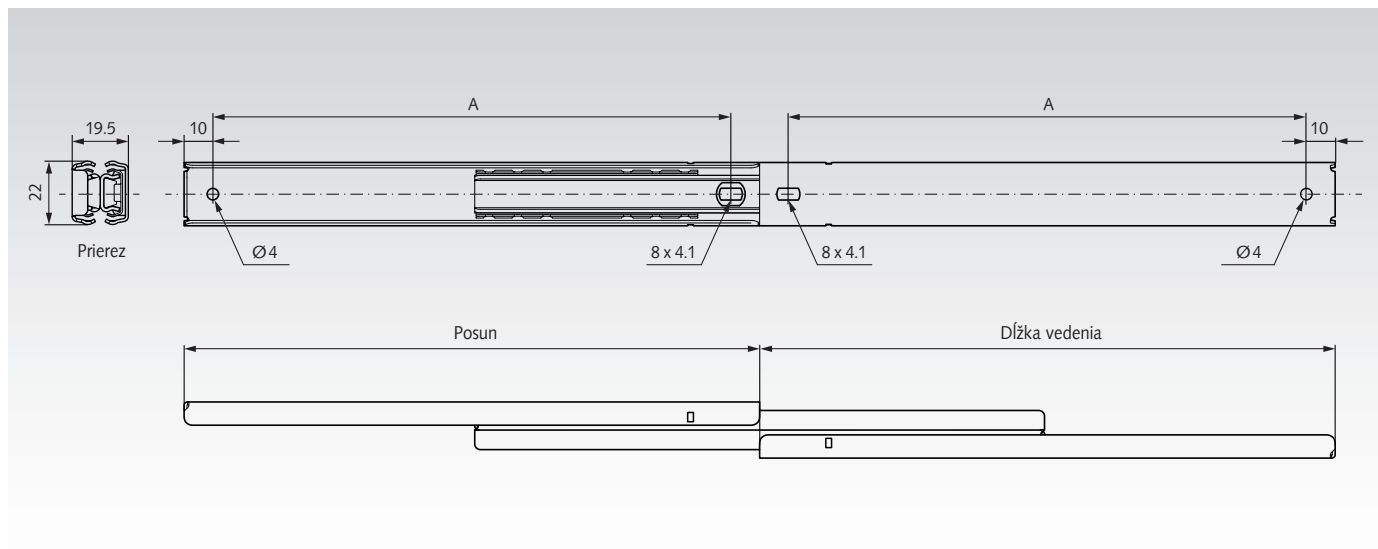

Produkt č. pre pár	Type	Dĺžka vedenia mm	Posun +/-3,2 mm	A mm	Nosnosť pre pár kg	Hmotnosť pre pár kg
649 066 15	DS2330-0015DL	150	150	130	9	0,316
649 066 20	DS2330-0020DL	200	210	180	11	0,420
649 066 25	DS2330-0025DL	250	250	230	12	0,535
649 066 30	DS2330-0030DL	300	310	280	14	0,640
649 066 35	DS2330-0035DL	350	350	330	15	0,750
649 066 40	DS2330-0040DL	400	410	380	15	0,854

Poznámka

Recommended mount: M4 screw.

Max. head height 3 mm.

Max. head diameter 8 mm.

During installation, the centre rail must be positioned so that the access hole matches the screw position.

Load ratings quoted are the maximum for a pair of side mounted slides installed 450 mm apart, unless otherwise stated.