

Dištančné dosky M2370, nerezová oceľ, pre pánty

Materiál: Stainless Steel 1.4301 (AISI304),
matte, tumbled finish.




The spacer plates are designed as accessories for several hinge families in terms of their dimensions so that they guarantee the desired position and height adjustment when mounted individually or in combination.

Informácie potrebné na objednanie: napr.: Produkt č. 67704001,
Dištančná doska M2370, 40 x 1mm

Produkt č.	l mm	b ₁ mm	b ₂ mm	d mm	m mm	s mm	Hmot. g
677 040 01	40 ¹⁾	14,5	7,5	5	25	1	4,1
677 040 02	40 ¹⁾	14,5	7,5	5	25	1,5	6,2
677 040 03	40 ¹⁾	14,5	7,5	5	25	3	12,4
677 040 05	40 ¹⁾	14,5	7,5	5	25	5	20,1
677 050 01	50 ²⁾	18	10	6	30	1	6,5
677 050 02	50 ²⁾	18	10	6	30	1,5	10,0
677 050 03	50 ²⁾	18	10	6	30	3	20,0
677 050 05	50 ²⁾	18	10	6	30	5	30,8
677 060 01	60	21,5	12,5	8	36	1	9,0
677 060 02	60	21,5	12,5	8	36	1,5	13,7
677 060 03	60	21,5	12,5	8	36	3	27,4
677 060 05	60	21,5	12,5	8	36	5	43,6

¹⁾ Nevhodné pre pánty M237.3 (typ A) a M437.1 až M437.4.

²⁾ Nevhodné pre pánty M437.1 až M437.4.

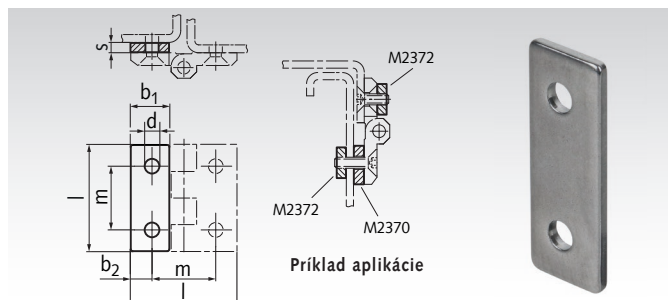

Poznámka

Tolerances of chamfers, different sheet metal thicknesses, or the use of seals could mean that the mounting surfaces of hinges on frames and doors are not aligned with each other as they should be. The spacer plates can be used to equalise the difference.

Dištančné dosky so závitovými otvormi M2372, nerezová oceľ, pre pánty

Materiál: Stainless Steel 1.4301 (AISI304),
matte, tumbled finish.




The spacer plates with tapped holes are designed as accessories for several hinge variations, eliminating the need for additional threads, nuts, and washers for mounting.

Informácie potrebné na objednanie: napr.: Produkt č. 67707203,
Závitová doska M2372, 40mm

Produkt č.	l mm	b mm	d mm	m mm	s mm	Hmot. g
677 072 03	40 ¹⁾	12	M5	25	3	10
677 072 04	50 ²⁾	15	M6	30	4	20
677 072 05	60	18	M8	36	4	29,4

¹⁾ Nevhodné pre pánty M237.3 (typ A) a M437.1 až M437.4.

²⁾ Nevhodné pre pánty M437.1 až M437.4.

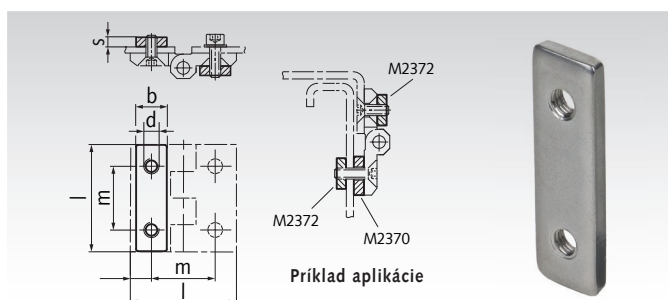

Poznámka

There is no need for the time-consuming preassembly of the above components or for counterholding during tightening or loosening. Mounted to the top side of the hinge, the plate offers entirely new design options.

Limitné zarážky M2374, oceľový investičný odlieatok, pre závesy M237, M237.1 a M337

Materiál: Steel Investment Casting, zinc-plated,
plastic coated black, RAL 9005, matt texture finish.
Elastomer element: NBR Hardness 85 ±5 Shore A.

The limit stoppers can be screwed on when mounting a hinge and limit the angle of rotation to the value w by means of an elastomer element. They are used preferably for lighter covers or when no dynamic load of the stop is to be expected.

Temperature resistant up to +120°C.

Informácie potrebné na objednanie: napr.: Produkt č. 67707403,
limitné zarážky M2374, 40mm

Produkt č.	l mm	b mm	d mm	h mm	m mm	s mm	w stupne	Hmot. g
677 074 03	40	12	5,3	7,8	25	3,5	150	10
677 074 04	50	15	6,3	9,2	30	4	150	12
677 074 05	60	18	8,3	10,9	36	5	150	21

