

F39

Miniature Puraire® oil removal filter



- Port size: G1/8 & G1/4
- Very compact unit
- Maximum remaining oil content to 0,01 mg/m³
- Particle removal to 0,01 µm
- Air purity classes in accordance to ISO8573-1: Remaining oil aerosol to class 1*
- *Tested in accordance with the methods laid out in ISO 12500-1 using an inlet oil aerosol concentration of 4mg/m³.



Technical features

Medium: Compressed air only	Flow: see below	Ambient/Media temperature: Transparent bowl -34 ... +50°C (-29 ... +122°F) Metal bowl -34 ... +65°C (-29 ... +149°F) Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35°F) Note: Install an F07 filter with a 5 µm filter element upstream of the F39 filter for maximum service life.	Materials: Body: Zinc alloy Bowl: Plastic or Zinc alloy Element: Synthetic fiber and PL foam Seals: NBR
Maximum inlet pressure: 10 bar (145 psi) Transparent bowl 17 bar (246 psi) Metal bowl	Port sizes: G1/8 or G1/4		
Filter element: 0,01 µm	Bowl: 31 ml		
Remaining oil content: 0,01 mg/m ³ at +21°C (+69°F)	Drain: Manual or automatic		

Technical data, Standardmodels

Symbol	Port size	Flow *1) (dm ³ /s)	Drain	Bowl	Weight (kg)	Model
	G1/8	2,8	Manual	Plastic	0,13	F39-100-M0TG
	G1/4	3	Manual	Plastic	0,13	F39-200-M0TG
	G1/8	2,8	Automatic	Plastic	0,13	F39-100-A0TG
	G1/4	3	Automatic	Plastic	0,13	F39-200-A0TG

*1) Max. flow at 6,3 bar

Option selector

Port size	Substitute				Thread	Substitute
1/8"	1				PTF	A
1/4"	2				ISO G	G
Drain	Substitute					
Automatic	A				Plastic	T
Manual	M				Metal	M

Typical performance characteristics

Inlet pressure (bar)	Flow *1) (dm ³ /s)
1	1,2
3	2,0
5	2,7
6,3	3,0
7	3,1
9	3,6

*1) Maximum flow to maintain stated oil removal performance.

Accessories



Service kit





Dimensions

Manual drain

Automatic drain

Wall mounting bracket

Dimensions in mm
Projection/First angle

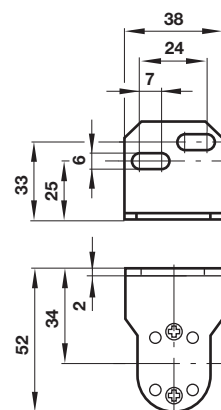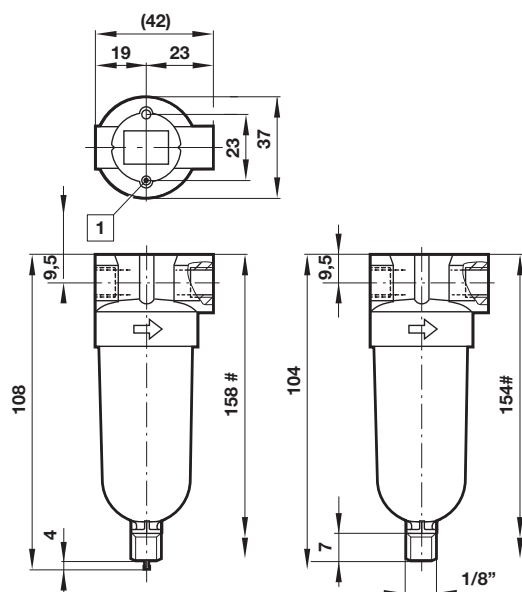

Use 1/8" (3 mm) screws
to mount bracket to wall.

Minimum clearance required to remove bowl
1 Holes \varnothing 4, 13 deep

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »Technical features/ data«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Norgren Ltd.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.